



## 2009+ Ford F150 2.5 Rear Shocks

King Shocks 12472 Edison Way Garden Grove, CA 92841  
714-530-8701 [www.kingshocks.com](http://www.kingshocks.com)

### Rear Parts List:

2 – 2.5 Piggy Back Rear Shocks  
(25001-214) 2009-2014 or (25001-356) 2015 +

### Tools Required:

Floor Jack/Jack Stands  
15mm & 18mm Socket/Wrench


### Ford F150

OEM PERFORMANCE SERIES



**REAR SHOCKS:** With the vehicle on level ground, block the front tires. Using a floor jack, raise the rear end and support the frame rails with jack stands for safety. Then remove the rear tires. **NOTE: Never work under an unsupported vehicle.**

1. Remove the factory shocks using a 15mm Socket/Wrench for the bolt head and an 18mm Socket/Wrench for the nut. First remove the lower bolt then remove the upper bolt and remove shock. Save the hardware.

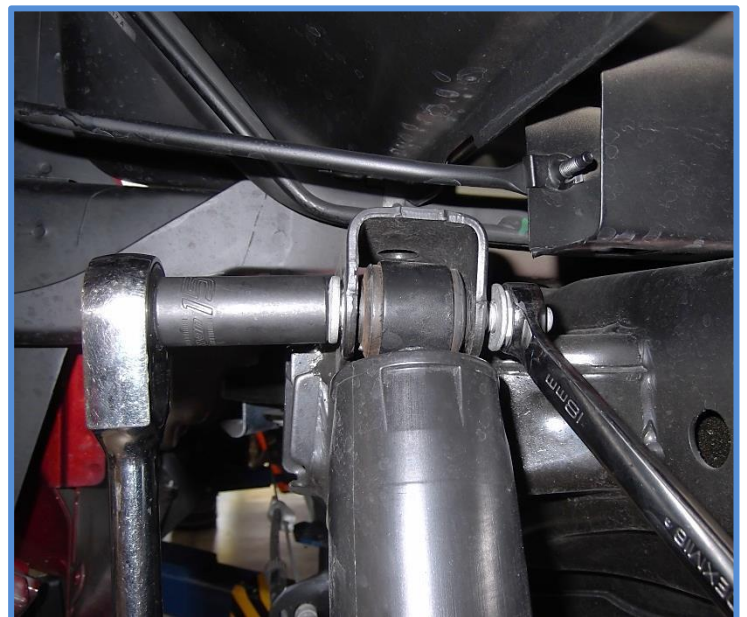

**IMPORTANT:** Read all instructions thoroughly from start to finish before beginning the install. Check parts list and make sure all parts are included in the kit. If the instructions are not properly followed severe frame, driveline and/or suspension damage may result. Check for frame and suspension damage prior to installation.

This kit does not require welding. Do not weld on any component. Welding may void the warranty and/or cause the product to fail. If any parts are missing, or for tech assistance; Contact King Off Road Racing Shocks: 714-530-8701 Most important after the install, Feel the difference and have fun.



## 2009+ Ford F150 2.5 Rear Shocks


King Shocks 12472 Edison Way Garden Grove, CA 92841  
714-530-8701 [www.kingshocks.com](http://www.kingshocks.com)

2. Install King Shocks using the factory hardware and torque to factory specs. Shocks must be installed with the reservoir on top and the shaft mounted to the axle. See photos for proper shock mounting.



### 2015 + Ford F150 Rear:

For 2015 and newer F150's the shocks are side specific. Be sure to mount the shocks with the longer bearing spacer towards the leaf spring as shown.

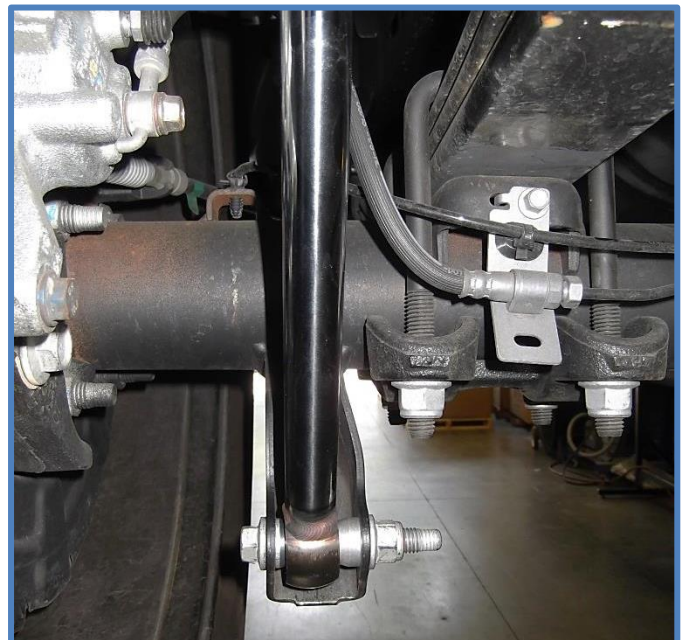

**IMPORTANT:** Read all instructions thoroughly from start to finish before beginning the install. Check parts list and make sure all parts are included in the kit. If the instructions are not properly followed severe frame, driveline and/or suspension damage may result. Check for frame and suspension damage prior to installation.

This kit does not require welding. Do not weld on any component. Welding may void the warranty and/or cause the product to fail. If any parts are missing, or for tech assistance; Contact King Off Road Racing Shocks: 714-530-8701 Most important after the install, Feel the difference and have fun.





## 2009+ Ford F150 2.5 Rear Shocks

King Shocks 12472 Edison Way Garden Grove, CA 92841  
714-530-8701 [www.kingshocks.com](http://www.kingshocks.com)

### 2015 + Ford F150 Rear:

Install King Shocks using the factory hardware and torque to factory specs. Shocks must be installed with the reservoir on top and the shaft mounted to the axle. Reservoirs should be facing towards the rear of the vehicle on both sides. See photos for proper shock mounting.

### LEFT



### RIGHT



**DOUBLE CHECK ALL HARDWARE:** Make sure everything is installed correctly and all hardware is tight before reinstalling tires. Install tires, remove jack stands and lower vehicle to the ground. Recheck all hardware and lug nuts after 100 miles and periodically after that as part of routine maintenance.

**IMPORTANT:** Read all instructions thoroughly from start to finish before beginning the install. Check parts list and make sure all parts are included in the kit. If the instructions are not properly followed severe frame, driveline and/or suspension damage may result. Check for frame and suspension damage prior to installation.

This kit does not require welding. Do not weld on any component. Welding may void the warranty and/or cause the product to fail. If any parts are missing, or for tech assistance; Contact King Off Road Racing Shocks: 714-530-8701 Most important after the install, Feel the difference and have fun.